
The Ultimate in Zero Clearance Direct Vent Fireplaces for New Home Construction or Renovation

Your best choice for installation anywhere throughout your home.

Louvered				Clean View Circulating Kit (CVC)		
ŀ	HBZDV36	HBZDV42		ŀ	HBZDV36	HBZDV4
Α	5413/16"	58 ¹³ /16"		Α	59 ⁷ /8"	6313/16"
В	363/8"	423/8"		В	38 ⁷ /16"	42 ⁷ /16"
С	36"	41 ⁷ /8"		С	38 ¹ /6"	421/16"
D	9 ³ /16"	81/4"		D	1011/16"	10 ¹ /16"
E	38 ³ /4"	41 ⁵ /8"		E	425/16"	45 ¹ /8"
F	123/8"	133/4"		F	123/8"	133/4"
G	17 ⁹ /16"	19 ¹ /2"		G	17 ⁹ /16"	19 ¹ /2"
Н	27 ³ /8"	29 ⁷ /16"		Н	29 ¹⁵ /16"	31 ⁷ /8"

ŀ	HBZDV36	HBZDV42	ŀ	HBZDV36	HBZDV42	_
4	54 ¹³ /16"	58 ¹³ /16"	Α	59 ⁷ /8"	6313/16"	
В	363/8"	423/8"	В	38 ⁷ /16"	42 ⁷ /16"	
С	36"	41 ⁷ /8"	С	38 ¹ /6"	421/16"	
D	9 ³ /16"	81/4"	D	1011/16"	10 ¹ /16"	
E	38 ³ / ₄ "	415/8"	E	425/16"	45 ¹ /8"	
F	123/8"	133/4"	F	123/8"	133/4"	
G	17 ⁹ /16"	19 ¹ /2"	G	17 ⁹ /16"	19 ¹ /2"	
Н	273/8"	29 ⁷ /16"	Н	29 ¹⁵ /16"	31 ⁷ /8"	



Top Flue Model	Height		Front Width		Depth	
TOP FIVE MODEL	Actual	Framing	Actual	Framing	Actual	Framing
Louvers						
HBZDV36	3413/16"	35"	36"	36 ³ /8"	16 ⁷ /16"	1 <i>7"</i>
HBZDV42	37"	37 ¹ /8"	41 ⁷ /8"	423/8"	16 ⁷ /16"	17"
Clean View Circulating Kit (CVCK)						
HBZDV36	3411/16"	41"	38 ¹ /16"	38 ⁷ /16"	18 ⁷ /8"	19 ¹ /2"
HBZDV42	36 ¹³ /16"	43"	42 ¹ /16"	42 ⁷ /16"	18 ¹⁵ /16"	19 ¹ /2"

Top Flue Model	Width	Height	
Viewing Area			
HBZDV36	29³/4"	185/8"	
HBZDV42	333/8"	20 ³ /8"	

Enjoy the elegance and warmth of glowing embers and dancing flames around your choice of log sets. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 25 years of experience.

Here is a fireplace that has a fully sealed combustion chamber with no pollution spillage to depreciate the indoor air quality of your home.

Model	HBZDV3624N	HBZDV3628N	HBZDV3624LP	HBZDV3628LF
	HBZDV4224N	HBZDV4228N	HBZDV4224LP	HBZDV4228LF
Flue	top	top	top	top
Fuel	natural	natural	propane	propane
Input Max.	24,000 BTU	28,000 BTU	22,000 BTU	26,000 BTU
Input Min.	14,000 BTU	20,000 BTU	15,000 BTU	19,000 BTU
Output Max.	-	21,000 BTU	15,000 BTU	19,500 BTU
Efficiency	-	76% fan on	_	76% fan on
FE (P.4.1-02)	51.0%/44.7%	58.7%/57.7%	46.0%/47.9%	62.4%/58.6

Standard Features

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed

Optional Features

Designer Clean View Circulating Kit - No Louvers Required, Optional Pull Screens

Decorative Black Panels or Grills – Grills available in Black. Classic Series Black with Polish Brass, Antique or Chrome Accents

Overlay Doors - Deluxe, Top Half, Double Arch and Double Door

Designer Doors – Arch or Straight Black Doors with Antique, Polished or Chrome Trims

Surrounds Wide (Louvered Units) - Polish Brass, Antique or Chrome

Coverage - HBZDV3624/28 - 351/2" h x 411/8" w

HBZDV4224/28 - 37⁵/8" h x 45 ¹/8" w

Surrounds Slim Line (Louvered Units) - Polish Brass, Antique Brass, Chrome or Gun Metal Black, Coverage - HBZDV3624/28 - 351/4" h x 371/2" w

HBZDV4224/28 - 37³/8" h x 43³/8" w

Fan Kit - Heat activated with variable speed control


Brick Refractory Liner – Traditional or Herringbone

Thermostat – Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control - On/Off, Thermostat On/Off, Hi/Lo On/Off


Child Safety Screen

ingsman Industries maintains a program of continuous testing refinen nd improvements of all its products. Some aspect of units shown here e changed at any time without notice or obligation.







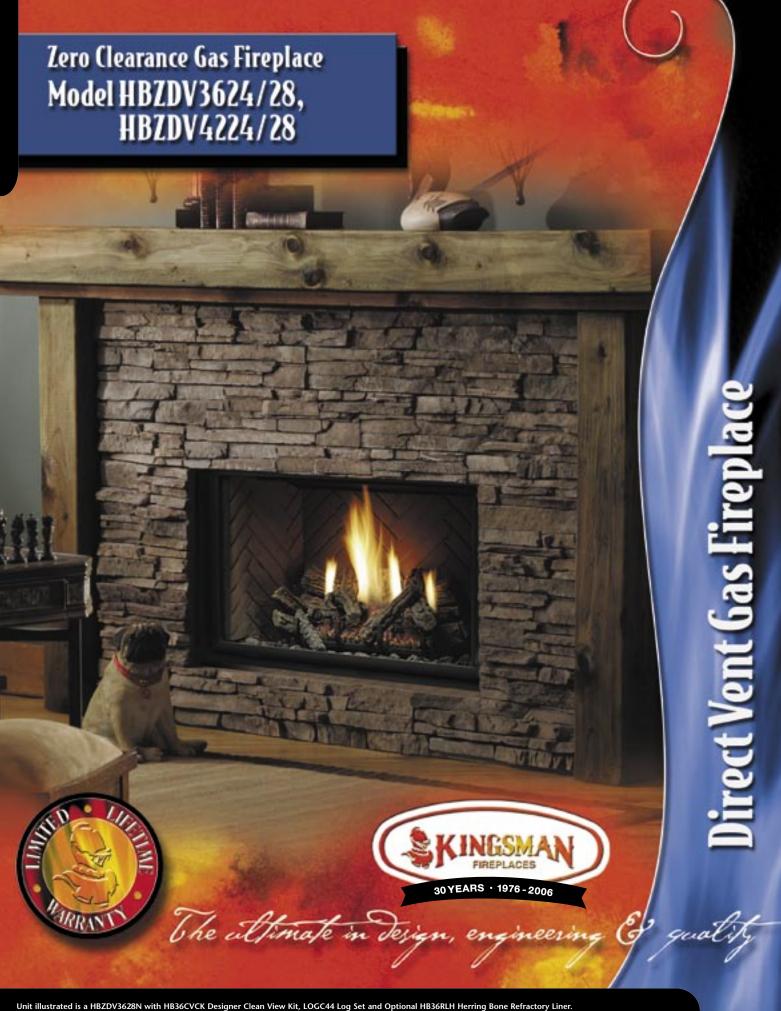





Kingsman Fireplaces 2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960 www.kingsmanfireplaces.com

