



HBZDV4740/4232/3632

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



The Ultimate in Design, Engineering & Quality

Unit illustrated is a HBZDV4740N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGC60 Log Set, HB47CVCK Designer Clean View Circulating Kit, and Optional HB47RLH Refractory Liner – Herring Bone.

DESIGNER CLEAN VIEW™ or LOUVERED FIREPLACES

Kingsman's Direct Vent models are easily adaptable to our patented Designer Clean View technology or standard louvers.

Enjoy an incredible line of options and styles – from contemporary to classic – plus the beauty and pleasure of a cozy fire.



A



B



C

The Ultimate in Design, Engineering & Quality



- A Model HBZDV3632N, HB36CVCK Designer Clean View Kit, LOGC60 Log Set, and Optional HB36RLH Herring Bone Refractory Liner and HB36DDS1BL Designer Straight Door
- B Model HBZDV4740N, with HB47GBL Black Grill, LOGC60 Log Set, and Optional HB47RLT Traditional Refractory Liner
- C Model HBZDV3632N with HB36GBC Chrome Grill, LOGC60 Log Set and Optional HB36RLT Traditional Refractory Liner, HB36ADDA Double Arch Door




The Ultimate in Zero Clearance Direct Vent Fireplaces for New Home Construction or Renovation

YOUR BEST CHOICE FOR INSTALLATION ANYWHERE THROUGHOUT YOUR HOME.

CORNER FRAMING DIMENSIONS (INCHES)

LOUVERED			CLEAN VIEW CIRCULATING KIT (CVCK)				
	HBZDV36	HBZDV42	HBZDV47		HBZDV36	HBZDV42	HBZDV47
A	54 ¹³ / ₁₆ "	58 ¹³ / ₁₆ "	65 ¹ / ₄ "	A	59 ⁷ / ₈ "	63 ¹³ / ₁₆ "	70 ³ / ₁₆ "
B	36 ³ / ₈ "	42 ³ / ₈ "	47 ³ / ₈ "	B	38 ⁷ / ₁₆ "	42 ⁷ / ₁₆ "	48 ³ / ₈ "
C	36"	41 ⁷ / ₈ "	47 ¹ / ₁₆ "	C	38 ¹ / ₁₆ "	42 ¹ / ₁₆ "	48 ¹ / ₁₆ "
D	9 ³ / ₁₆ "	8 ¹ / ₄ "	8 ¹⁵ / ₁₆ "	D	10 ¹¹ / ₁₆ "	10 ¹ / ₁₆ "	10 ⁷ / ₈ "
E	38 ³ / ₄ "	41 ⁵ / ₈ "	41 ¹ / ₈ "	E	42 ⁵ / ₁₆ "	45 ¹ / ₈ "	49 ⁵ / ₈ "
F	12 ³ / ₈ "	13 ³ / ₄ "	13 ¹⁵ / ₁₆ "	F	12 ³ / ₈ "	13 ³ / ₄ "	13 ¹⁵ / ₁₆ "
G	17 ⁹ / ₁₆ "	19 ¹ / ₂ "	19 ¹¹ / ₁₆ "	G	17 ⁹ / ₁₆ "	19 ¹ / ₂ "	19 ¹¹ / ₁₆ "
H	27 ³ / ₈ "	29 ⁷ / ₁₆ "	32 ⁵ / ₈ "	H	29 ¹⁵ / ₁₆ "	31 ⁷ / ₈ "	35 ¹ / ₁₆ "

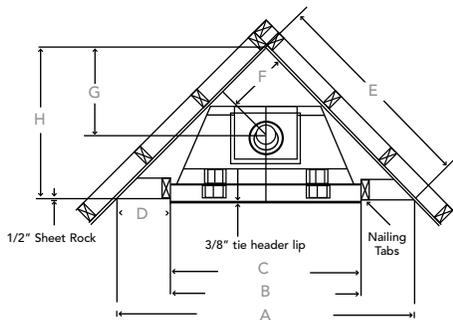

TOP FLUE MODELS	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
LOUVERS						
HBZDV36	34 ¹³ / ₁₆ "	35"	36"	36 ³ / ₈ "	16 ⁷ / ₁₆ "	17"
HBZDV42	37"	37 ¹ / ₈ "	41 ⁷ / ₈ "	42 ³ / ₈ "	16 ⁷ / ₁₆ "	17"
HBZDV47	43 ¹ / ₁₆ "	43 ¹ / ₁₆ "	47 ¹ / ₁₆ "	47 ³ / ₈ "	19 ⁷ / ₁₆ "	19 ¹ / ₂ "
CLEAN VIEW CIRCULATING KIT (CVCK)						
HBZDV36	34 ¹¹ / ₁₆ "	41"	38 ¹ / ₁₆ "	38 ⁷ / ₁₆ "	18 ⁷ / ₈ "	19 ¹ / ₂ "
HBZDV42	43"	43 ¹ / ₈ "	42 ¹ / ₁₆ "	42 ⁷ / ₁₆ "	18 ¹⁵ / ₁₆ "	19 ¹ / ₂ "
HBZDV47	49"	49 ¹ / ₈ "	48 ¹ / ₁₆ "	48 ³ / ₈ "	21 ¹⁵ / ₁₆ "	22"

TOP FLUE MODELS	Width	Height
VIEWING AREA		
HBZDV36	29 ³ / ₄ "	18 ⁵ / ₈ "
HBZDV42	33 ³ / ₈ "	20 ³ / ₈ "
HBZDV47	39 ¹ / ₂ "	26 ³ / ₈ "

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: The model HBZDV4740 is certified to ANSI Z21.50a-2000/CSA 2.22a-2000, CGA 2.17-M91, CSA P4.1-02 vented gas fireplace. The models HBZDV3632/4232 are certified to ANSI Z21.88b-2003/CSA-2.33b-2003, CAN/CGA 2.17-M91, CSA P4.1-02 vented gas fireplace heater.

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.



2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

Enjoy the elegance and warmth of glowing embers and dancing flames around your choice of log sets. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 30 years of experience. Here is a fireplace that has a fully sealed combustion chamber with no pollution spillage to depreciate the indoor air quality of your home.

Model	HBZDV3632N HBZDV4232N	HBZDV3632LP HBZDV4232LP	HBZDV4740N	HBZDV4740LP
Flue	top	top	top	top
Fuel	natural	propane	natural	propane
Input Max.	30,500 BTU	29,000 BTU	40,000 BTU	36,000 BTU
Input Min.	20,600 BTU	22,200 BTU	27,000 BTU	30,000 BTU
Output Max.	22,875 BTU	21,750 BTU	-	-
Efficiency	75%	75%	-	-
FE (P4.1-02)	60.9%/56.8%	62.4%/56.8%	46.5%	42.5%

FEATURES*

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed

OPTIONAL FEATURES

Designer Clean View Circulating Kit – No Louvers Required, Optional Pull Screens

Decorative Black Panels or Grills – Grills available in Black. Classic Series Black with Polish Brass, Antique or Chrome Accents

Overlay Doors – Deluxe, Top Half, Double Arch and Double Door

Designer Doors – Arch or Straight Black Doors with Antique, Polished or Chrome Trims

Surrounds Wide (Louvered Units) - Polish Brass, Antique or Chrome
Coverage – HBZDV3632 – 34¹/₂" h x 41¹/₈" w
 HBZDV4232 – 36⁵/₈" h x 45¹/₈" w
 HBZDV4740 – 42²/₈" h x 50¹/₈" w

Surrounds Slim Line (Louvered Units) - Polish Brass, Antique Brass, Chrome or Gun Metal Black
Coverage – HBZDV3632 – 34¹/₄" h x 37¹/₂" w
 HBZDV4232 – 36³/₈" h x 43³/₈" w
 HBZDV4740 – 42³/₈" h x 48³/₈" w

Fan Kit – Heat activated with variable speed control

Brick Refractory Liner – Traditional or Herringbone

Thermostat – Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control – On/Off, Thermostat On/Off

Child Safety Screen